

DH-PFM940I-59N/2

200m RG59 Coaxial Cable with Power Cable (RG59+2C)



Features

- 200m RG59 with power cable, transmit both data and power, wooden spool;
- Professional quality cable for use with most CCTV camera systems;
- Supplied on wooden reels for easy storage and installation;
- Environmentally-friendly outer sheath, meet the CPR E class;


Technical Specifications

Model		DH-PFM940I-59N/2
RG59 Coaxial Cable		
Conductor	Material	OFC
	Wire gauge	20AWG (0.8mm)
Insulation	Material	FPE
	Diameter	3.7mm±0.10mm
Tape	Material	Single-sided aluminum foil
	thickness	0.026mm
Braid	Braiding Material	Al-mg wire (Aluminum magnesium alloy wire)
	Braiding Structure	0.12mm*64(16*4)
Jacket	Material	PVC, meet the requirement of CPR E class
	Min. average thickness	0.8mm
	Diameter	6.1mm± 0.2mm
	Color	Black
Power Cable(2C)		
Conductor	Material	OFC
	Wire gauge	0.32mm*7
Insulation	Material	PVC
	Diameter	1.8mm±0.10mm
	Color	Red/black
Jacket	Material	PVC, meet the requirement of CPR E class
	Diameter	4.85mm±0.20mm
	Color	Black
General		
Length		200m (656.17ft)
Mark spacing		1000mm
Impedance		75Ω±3Ω
General	Working temperature	-20°C ~ +70°C (-4°F ~ +158°F)
	Storage temperature	-40°C ~ +80°C (-40°F ~ +176°F)
	N.W.	13.0kg(28.66lb)
	Weight(with wooden spool)	13.5kg(29.76lb)
	Packaging dimension	Φ300mm*300mm(Φ11.81"x11.81")

Order Information

Type	Part Number	Description
Cable	DH-PFM930-59N	200m RG59 Coaxial Cable
	DH-PFM930I-6N	200m RG6 Coaxial Cable
	DH-PFM940I-59N/2	200m RG59 Coaxial Cable with Power Cable (RG59+2C)
	DH-PFM940I-6N/2	200m RG6 Coaxial Cable with Power Cable (RG6+2C)

Dimensions (mm/inch)

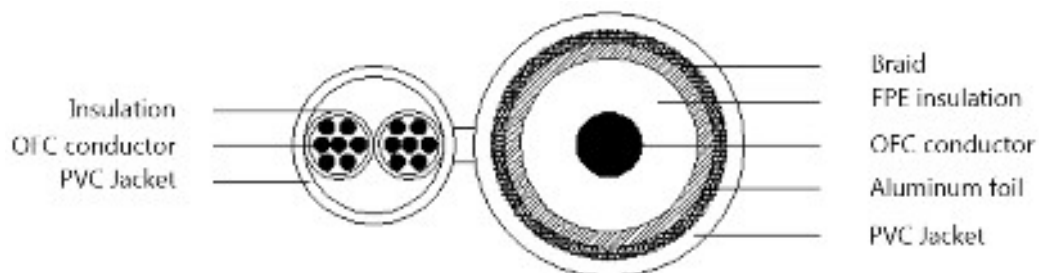

Package Information

- 200m RG59 Coaxial Cable with Power Cable (RG59+2C) *1